



NORDIC CCM0530 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B530SS bin

Protected by Agion




FEATURES


- High-yield** – Produces up to 600 lbs. (273 Kgs.) of ice/day
- Durable** – Constructed from corrosion-resistant stainless steel
- Antimicrobial** – Built-in Agion Antimicrobial product protection effective against mold, mildew, and fungus
- Small footprint** – Ultra low-profile - only 20" (508 mm) tall
- Smart** – Harvest assist reduces utility consumption
- Customizable** – Choice of full or half cube size
- Easy to maintain** – No air filter to clean or replace

OPERATING LIMITS

Ambient Temp. Range Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)

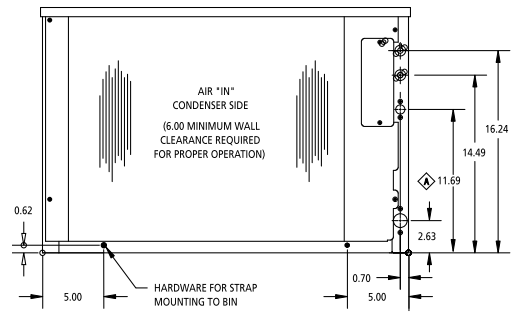

Dimensions and Air Flow

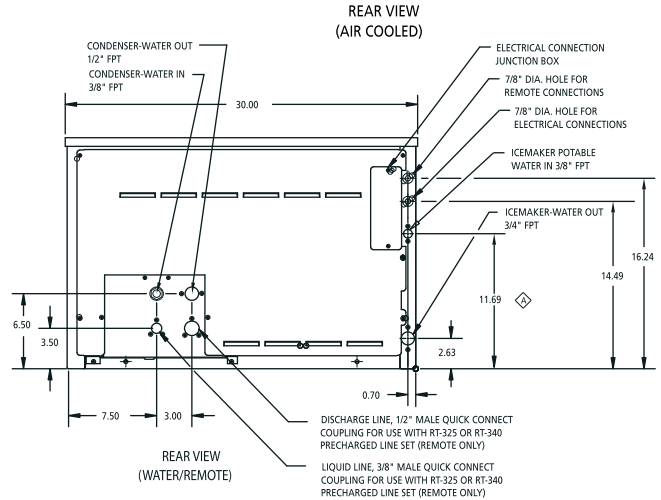

MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
CCM0530A*1	Air	600 (273)	458 (208)	24.0	n/a	6.2	9835	115/60/1	19.1
CCM0530W*1	Water	596 (271)	513 (233)	24.2	n/a	4.9	9777	115/60/1	14.3


MODEL NO.	Description	Shipping Weight lbs. (Kgs.)
RC05001	Remote Condenser for 1 or 2 model CCM0530R (115/50-60/1 voltage)	95 (43)
RT25	25 ft. (7.6m) Precharged Tubing Kit for R-404A models	13 (6)
RT40	40 ft. (12m) Precharged Tubing Kit for R-404A models	18 (8)
RT60	60 ft. (18.2m) Precharged Tubing Kit for R-404A models	26 (12)

See Bin specification sheet for information on storage bins
 * Represents cube size. For full cube substitute an "F", for half cube substitute an "H".

TECHNICAL SPECIFICATIONS

NUMBER OF WIRES 3
 FUSE SIZE 20
 SHIPPING WEIGHT LBS (KGS.) . . 170 (77)

AGENCY LISTINGS LISTED



Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)



© 2016 CORNELIUS CG5060-0516

IN THE U.S.A.
 Ph: 800.238.3600
 Fax: 800.258.0255

OUTSIDE THE U.S.A.
 Ph: 763.488.8200
 Email: webmaster@cornelius.com

101 Broadway Street West
 Osseo, MN 55369
 www.cornelius.com

For more information or to place an order, contact your sales representative or authorized distributor.